

	REVISION HISTORY							
REV	DESCRIPTION	DATE	APPROVED					

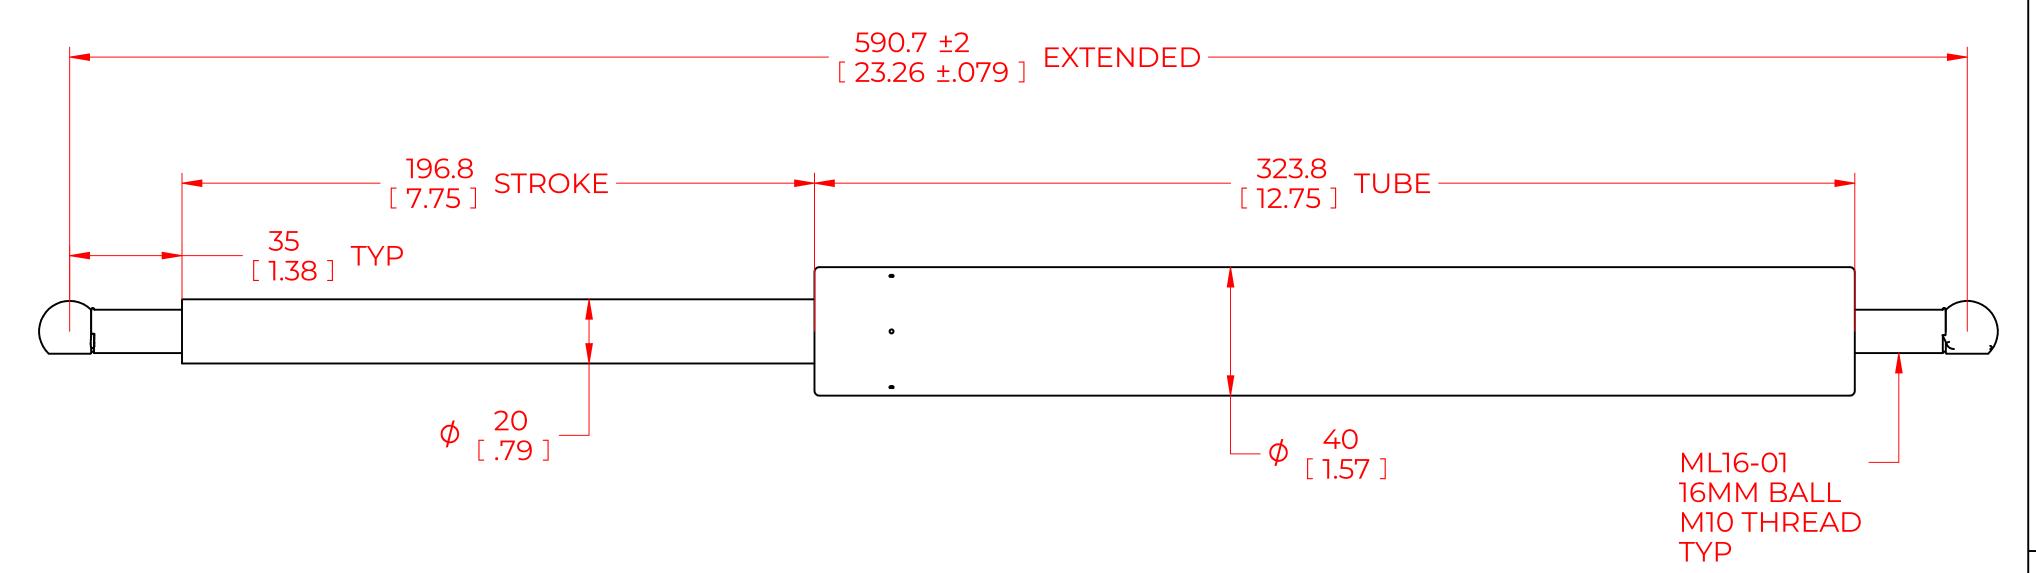

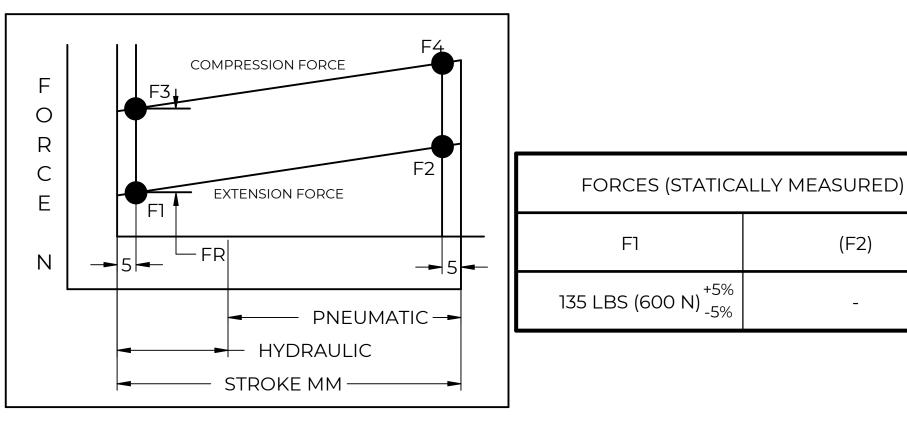

## **NOTES:**

- 1) MATERIAL: CYLINDER STEEL, BLACK PAINT / ROD STEEL BLACK NITRIDE.
- 2) OPERATING TEMPERATURE: -40°C TO +80°C.
- 3) STANDARD PART IDENTIFICATION TO INCLUDE PART NUMBER, DATE CODE AND WARNING MESSAGE. LABEL NOT TO BE REMOVED.
- 4) GAS SPRING IS SUGGESTED TO BE MOUNTED SHAFT DOWN (ROD DOWN) FOR MAXIMUM PERFORMANCE.
- 5) END FITTINGS TO BE ORIENTED AS SHOWN ±5°.
- 6) GAS SPRINGS WILL BE SEALED IN CLEAR PLASTIC BAGS TO AVOID DAMAGE, DUST, OR OTHER FOREIGN OBJECTS.
- 7) GAS SPRING TO BE ASSEMBLED WITH END FITTINGS COMPLETELY FASTENED.
- 8) GREASE TO BE INCLUDED INSIDE THE BALL SOCKET OF THE END FITTINGS.

			NAME		DATE	
NORI	DRAWN	DMA		3/19/2024		
	CHECKED					
THIS DOCUMENT AND ITS C	PART No.	NSG2050Y600ML16-01			REV -	
THIS DOCUMENT CC	OF NORMONT OCUMENT CONTAINS CONFIDENTIAL ARY INFORMATION. THE REPRODUCTION,		GAS SPRING			
DISTRIBUTION, UTILISATIO	DISTRIBUTION, UTILISATION OR THE COMMUNICATION OF THIS DOCUMENT OR ANY PART THEREOF, WITHOUT			THIRD ANGLE		SCALE
EXPRESS AUTHORISATION IS STRICTLY FORBIDDEN.		X.X	± 0.060	PROJECTION		NTS
	ALL DIMENSIONS ARE  DUAL  UNLESS OTHERWISE  SPECIFIED	X.XX	± 0.030		1	1110
REMOVE ALL BURRS AND BREAK		X.XXX	± 0.010		<u> </u>	SIZE
ALL SHARP EDGES		ANGLES	± 1°			C
		HOLES	± 0.005	SHEET 1 OF 1		