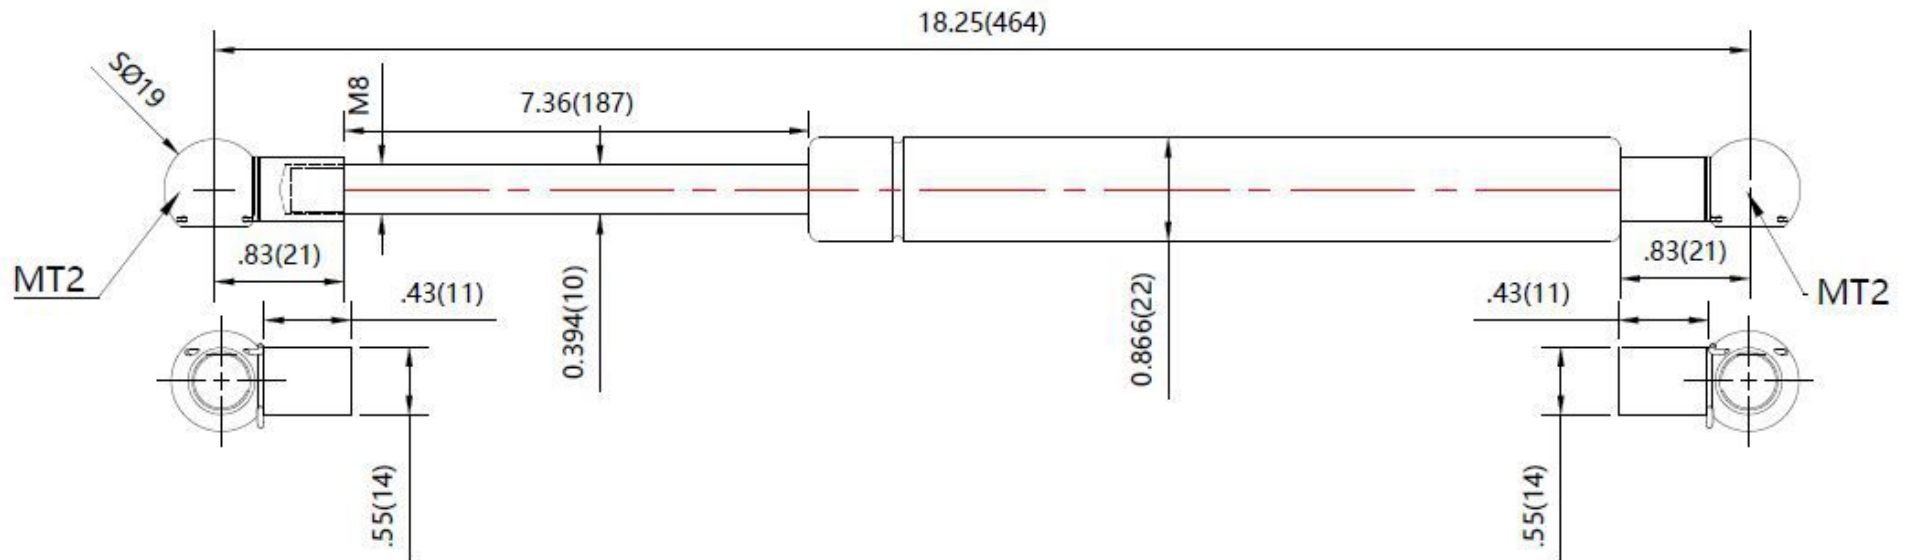




REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED



**NOTES**

1. MATERIAL : CYLINDER - HEAVY GAUGE STEEL , BLACK POWDERCOAT PAINT  
ROD - HARDENED STEEL BLACK NITRIDE
2. FORCE: 250LBS/ 1112.5N
3. DIMENSIONS ASSUMING END CONNECTORS ARE FULLY SCREWED INTO PLACE
4. DRAWING LENGTHS ( NOT DIMENSIONED ) OF CYLINDER AND ROD BODIES ARE NOT TO SCALE
5. OPERATING TEMPERATURE : - 30 C TO + 80 C
6. Label to include part number , date code , and warning message Label not to be remove
7. Gas Spring not to be modified , or changed from manufactured , original , product
8. Gas Spring to is suggested to be mounted shaft down ( rod down ) for maximum performance
9. Connectors to be lined up per drawing . 5 degree deviation permitted
10. Gas Springs will be individually packed in sealed clear plastic bags , to avoid damage , dust , or other foreign material - objects
11. Gas Spring to be assembled per the drawing with end fittings assembled / fastened
12. Gas Springs are not to be opened
13. Inside of each end fitting to be greased

	NAME	DATE
	Allen	12/13/19
DRAWN	CHECKED	
DWG NO	REV	
NSG1825L250MT2	0	
TITLE		
Gas Spring		
TOLERANCES	THIRD ANGLE PROJECTION	SCALE
X.X ±0.060		N.T.S.
X.XX ±0.030		SIZE
X.XXX ±0.015	SHEET 1 OF 1	B
ANGLES ±1.0°		
HOLES ±0.005		
REMOVE ALL BURRS & BREAK ALL SHARP EDGES	ALL DIMENSIONS ARE IN <b>inch</b> UNLESS OTHERWISE SPECIFIED	