
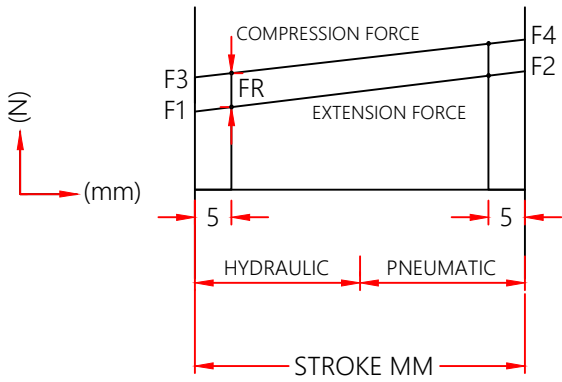


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED

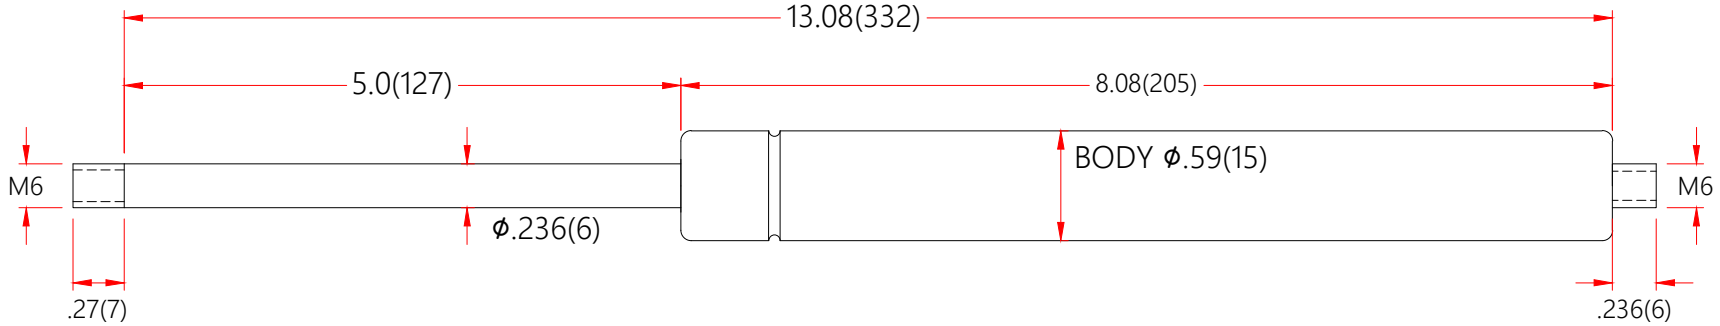

- NOTES
1. MATERIAL: CYLINDER - HEAVY GAUGE STEEL, BLACK PAINT. ROD - HARDENED STEEL BLACK NITRIDE
  2. FORCE: 30LBS/ 133N
  3. Drawing lengths (not dimensioned) of cylinder and rod bodies are not to scale
  4. Operating temperature: -30°C TO +80°C
  - 5 Standard label to include part number, date code, and warning message. Label not to be removed
  6. Gas Spring not to be modified, or changed from manufactured, original, product
  7. Gas Spring is suggested to be mounted shaft down (rod down) for maximum performance
  8. Gas Springs will be individually packed in sealed clear plastic bags, to avoid damage, dust, or other foreign material objects
  9. Gas Springs are not to be opened

<b>NORMONT</b>	DRAWN	NAME FAITH	DATE 2/16/23										
	CHECKED												
<small>THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF NUJOMENG. THIS DOCUMENT CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION. THE REPRODUCTION, DISTRIBUTION, UTILISATION OR THE COMMUNICATION OF THIS DOCUMENT OR ANY PART THEREOF, WITHOUT EXPRESS AUTHORISATION IS STRICTLY FORBIDDEN.</small>	DWG NO NSG1450S30		REV 0										
	TITLE Gas Spring												
	TOLERANCES	THIRD ANGLE PROJECTION	SCALE N.T.S.										
REMOVE ALL BURRS & BREAK ALL SHARP EDGES	ALL DIMENSIONS ARE IN <b>Inch</b> UNLESS OTHERWISE SPECIFIED	<table border="1"> <tr> <td>X.X</td> <td>±0.060</td> </tr> <tr> <td>X.XX</td> <td>±0.030</td> </tr> <tr> <td>X.XXX</td> <td>±0.015</td> </tr> <tr> <td>ANGLES</td> <td>±F/6</td> </tr> <tr> <td>HOLES</td> <td>±0.005</td> </tr> </table>	X.X	±0.060	X.XX	±0.030	X.XXX	±0.015	ANGLES	±F/6	HOLES	±0.005	
X.X	±0.060												
X.XX	±0.030												
X.XXX	±0.015												
ANGLES	±F/6												
HOLES	±0.005												
		SHEET 1 OF 1	SIZE <b>B</b>										