

	REVISION HISTORY						
	REV	DESCRIPTION	DATE	APPROVED			
	1						
	2						
	3						

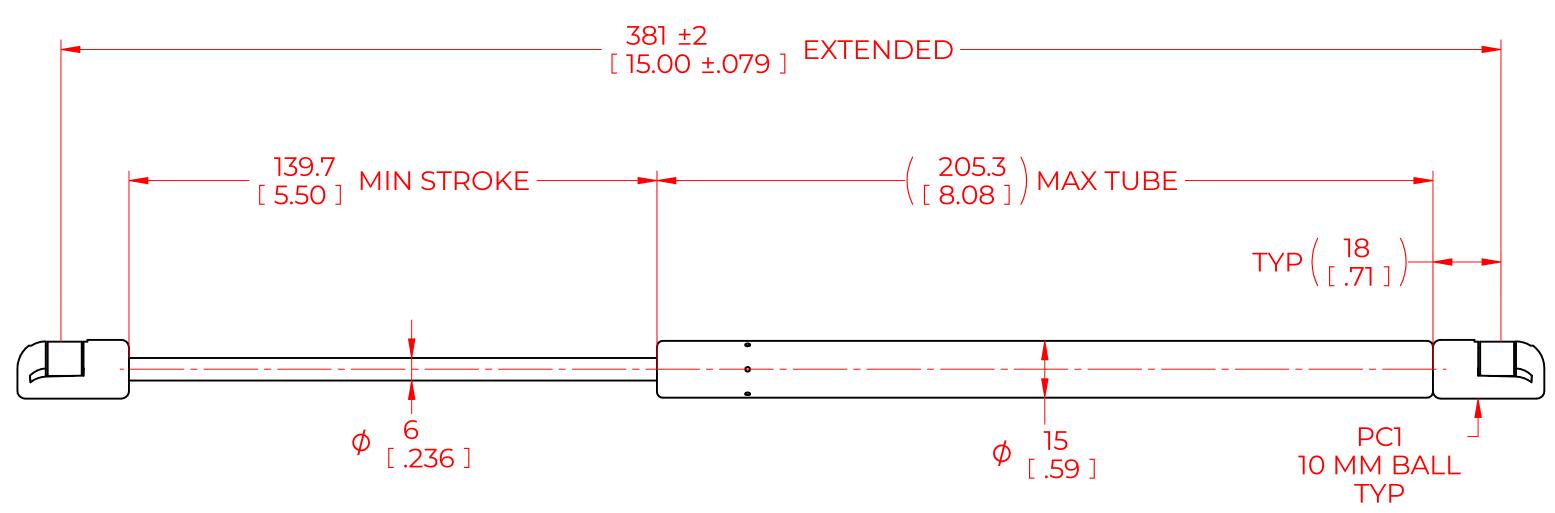

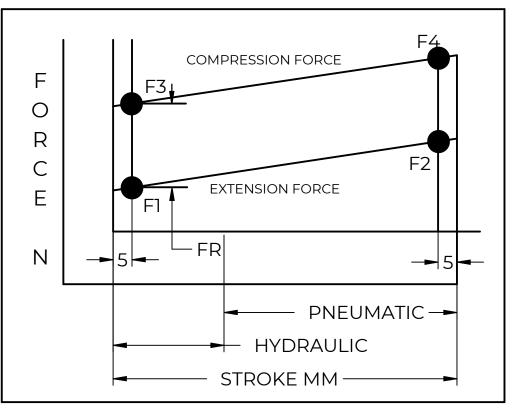

FORCES (STATICALLY MEASURED)						
Fl	(F2)					
40 LBS (178 N) ^{+10%} _{-5%}						

NOTES:

- 1) MATERIAL: CYLINDER HEAVY GAUGE STEEL, BLACK PAINT. ROD HARDENED STEEL BLACK NITRIDE.
- 2) OPERATING TEMPERATURE: -40°C TO +80°C.
- 3) STANDARD LABEL TO INCLUDE PART NUMBER, DATE CODE AND WARNING MESSAGE. LABEL NOT TO BE REMOVED.
- 4) GAS SPRING NOT TO BE CHANGED OR MODIFIED FROM ITS ORIGINAL MANUFACTURED INTENT.
- 5) GAS SPRING IS SUGGESTED TO BE MOUNTED SHAFT DOWN (ROD DOWN) FOR MAXIMUM PERFORMANCE.
- 6) CONNECTORS TO BE ORIENTED AS SHOWN ±5°.
- 7) GAS SPRINGS WILL BE SEALED IN CLEAR PLASTIC BAGS TO AVOID DAMAGE, DUST, OR OTHER FOREIGN OBJECTS.
- 8) GAS SPRING TO BE ASSEMBLED WITH END FITINGS COMPLETELY FASTENED.
- 9) GAS SPRINGS ARE NOT TO BE OPENED.
- 10) GREASE TO BE INCLUDED INSIDE THE BALL SOCKET OF THE END FITTINGS.

	401		NAME		DATE	
NOR	DRAWN	CSH		06/22/2023		
	CHECKED					
THIS DOCUMENT AND ITS C	PART No.	NSG1500S40PC1			REV	
THIS DOCUMENT CO	TITLE	TITLE GAS SPRING				
DISTRIBUTION, UTILISATION OF THIS DOCUMENT OR A	TOLERANCES		THIRD ANGLE		SCALE	
EXPRESS AUTHORISATION IS STRICTLY FORBIDDEN.		X.X	± 0.060	PROJECTION		1:1
	ALL DIMENSIONS ARE DUAL UNLESS OTHERWISE SPECIFIED	X.XX	± 0.030		1	
REMOVE ALL BURRS AND BREAK		X.XXX	± 0.010			SIZE
ALL SHARP EDGES		ANGLES	± 1°			C
		HOLES	± 0.005	SHEET 1 OF 1		