REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED

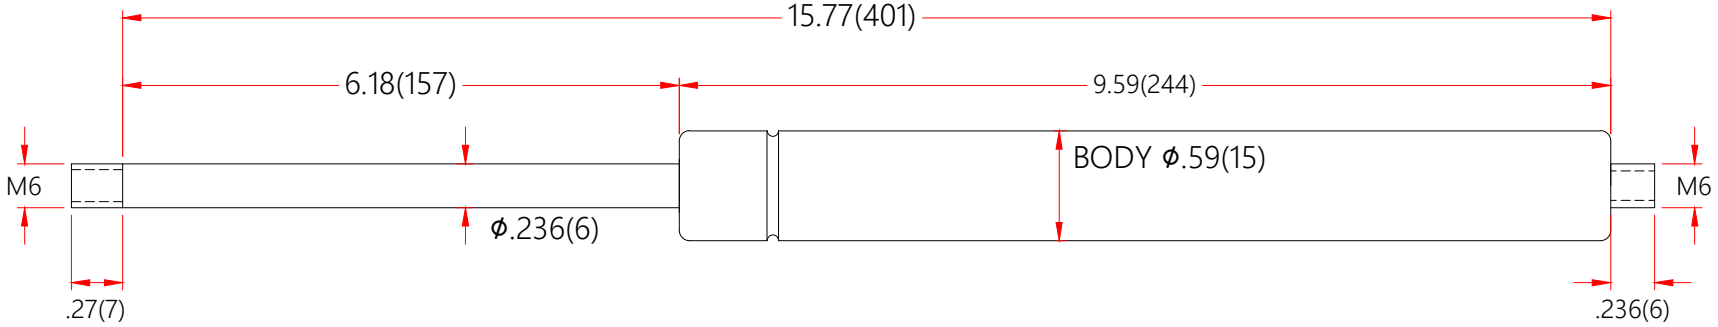

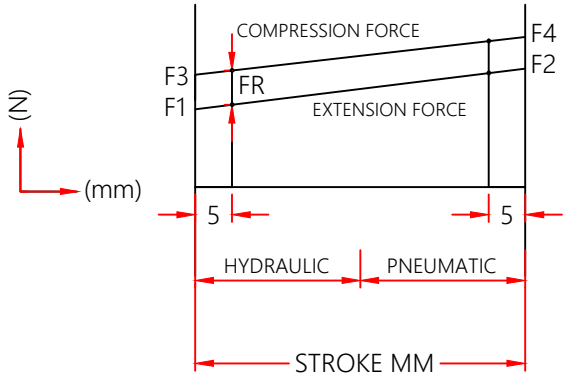

NOTES
1 . MATERIAL: CYLINDER - HEAVY GAUGE STEEL, BLACK PAINT. ROD - HARDENED STEEL BLACK NITRIDE
2. FORCE: 60LBS/ 267N
3. Drawing lengths (not dimensioned) of cylinder and rod bodies are not to scale
4. Operating temperature: -30°C TO +80°C
5 Standard label to include part number, date code, and warning message. Label not to be removed
6. Gas Spring not to be modified, or changed from manufactured, original, product
7. Gas Spring is suggested to be mounted shaft down (rod down) for maximum performance
8. Gas Springs will be individually packed in sealed clear plastic bags, to avoid damage, dust, or other foreign material objects
9. Gas Springs are not to be opened

NORMONT

	NAME	DATE
DRAWN	FAITH	10/20/22
CHECKED		

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF NUOMENG
THIS DOCUMENT CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION. THE REPRODUCTION, DISTRIBUTION, UTILISATION OR THE COMMUNICATION OF THIS DOCUMENT OR ANY PART THEREOF, WITHOUT EXPRESS AUTHORISATION IS STRICTLY FORBIDDEN.

DWG NO NSG1719S60
REV 0

TITLE Gas Spring

TOLERANCES	
X.X	±0.060
X.XX	±0.030
X.XXX	±0.015
ANGLES	±1.0A
HOLES	±0.005

THIRD ANGLE PROJECTION

SCALE N.T.S.

SIZE B

SHEET 1 OF 1

REMOVE ALL BURRS & BREAK ALL SHARP EDGES

ALL DIMENSIONS ARE IN Inch UNLESS OTHERWISE SPECIFIED