


| REVISION HISTORY | | | |
|------------------|-------------|------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| 1 | | | |
| 2 | | | |
| 3 | | | |

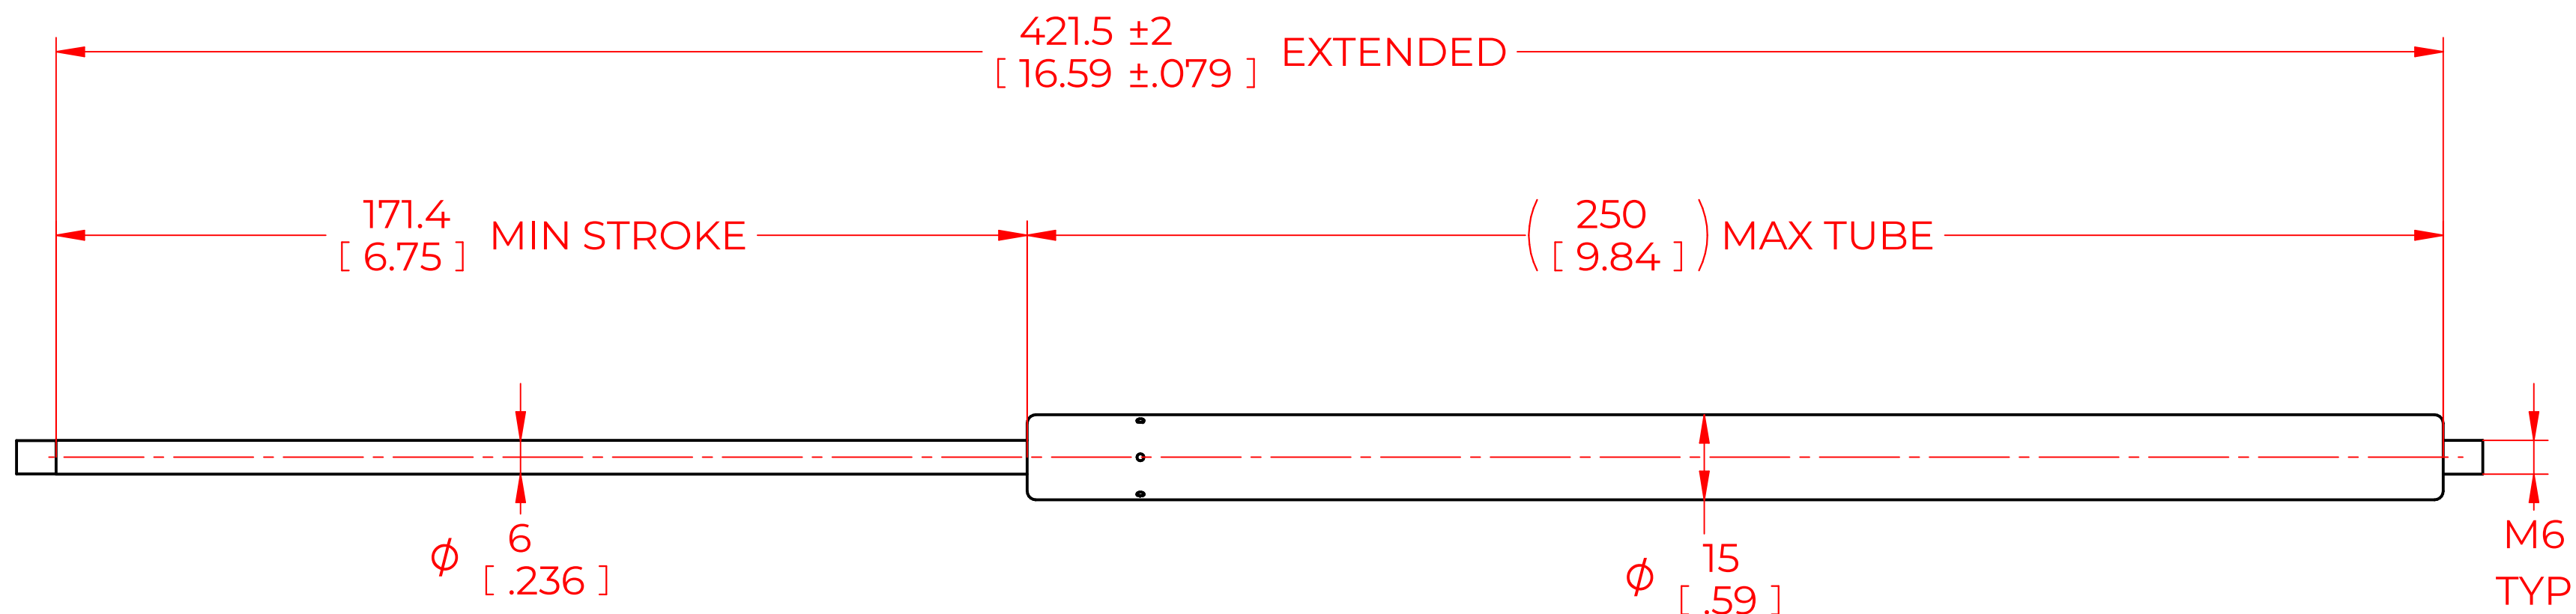

| FORCES (STATICALLY MEASURED) | |
|------------------------------|------|
| F1 | (F2) |
| 30 LBS (134 N) +10% -5% | |

NOTES:

- 1) MATERIAL: CYLINDER - HEAVY GAUGE STEEL, BLACK PAINT. ROD - HARDENED STEEL BLACK NITRIDE.
- 2) OPERATING TEMPERATURE: -40°C TO +80°C.
- 3) STANDARD LABEL TO INCLUDE PART NUMBER, DATE CODE AND WARNING MESSAGE. LABEL NOT TO BE REMOVED.
- 4) GAS SPRING NOT TO BE CHANGED OR MODIFIED FROM ITS ORIGINAL MANUFACTURED INTENT.
- 5) GAS SPRING IS SUGGESTED TO BE MOUNTED SHAFT DOWN (ROD DOWN) FOR MAXIMUM PERFORMANCE.
- 6) CONNECTORS TO BE ORIENTED AS SHOWN ±5°.
- 7) GAS SPRINGS WILL BE SEALED IN CLEAR PLASTIC BAGS TO AVOID DAMAGE, DUST, OR OTHER FOREIGN OBJECTS.
- 8) GAS SPRING TO BE ASSEMBLED WITH END FITINGS COMPLETELY FASTENED.
- 9) GAS SPRINGS ARE NOT TO BE OPENED.
- 10) GREASE TO BE INCLUDED INSIDE THE BALL SOCKET OF THE END FITTINGS.

| NORMONT | | NAME | DATE | | |
|--|---------|--------------|------------|--------------------------------|------|
| DRAWN | | CSH | 07/10/2023 | | |
| CHECKED | | | | | |
| THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF NORMONT | | PART No. | NSG1801S30 | | |
| THIS DOCUMENT CONTAINS CONFIDENTIAL PROPRIETARY INFORMATION. THE REPRODUCTION, DISTRIBUTION, UTILISATION OR THE COMMUNICATION OF THIS DOCUMENT OR ANY PART THEREOF, WITHOUT EXPRESS AUTHORISATION IS STRICTLY FORBIDDEN. | | TITLE | GAS SPRING | | |
| REMOVE ALL BURRS AND BREAK ALL SHARP EDGES ALL DIMENSIONS ARE DUAL UNLESS OTHERWISE SPECIFIED | | TOLERANCES | SCALE | | |
| | | X.X | ± 0.060 | THIRD ANGLE PROJECTION | |
| | | X.XX | ± 0.030 | | 1:1 |
| | | X.XXX | ± 0.010 | | SIZE |
| ANGLES | ± 1° | | C | | |
| HOLES | ± 0.005 | SHEET 1 OF 1 | | | |