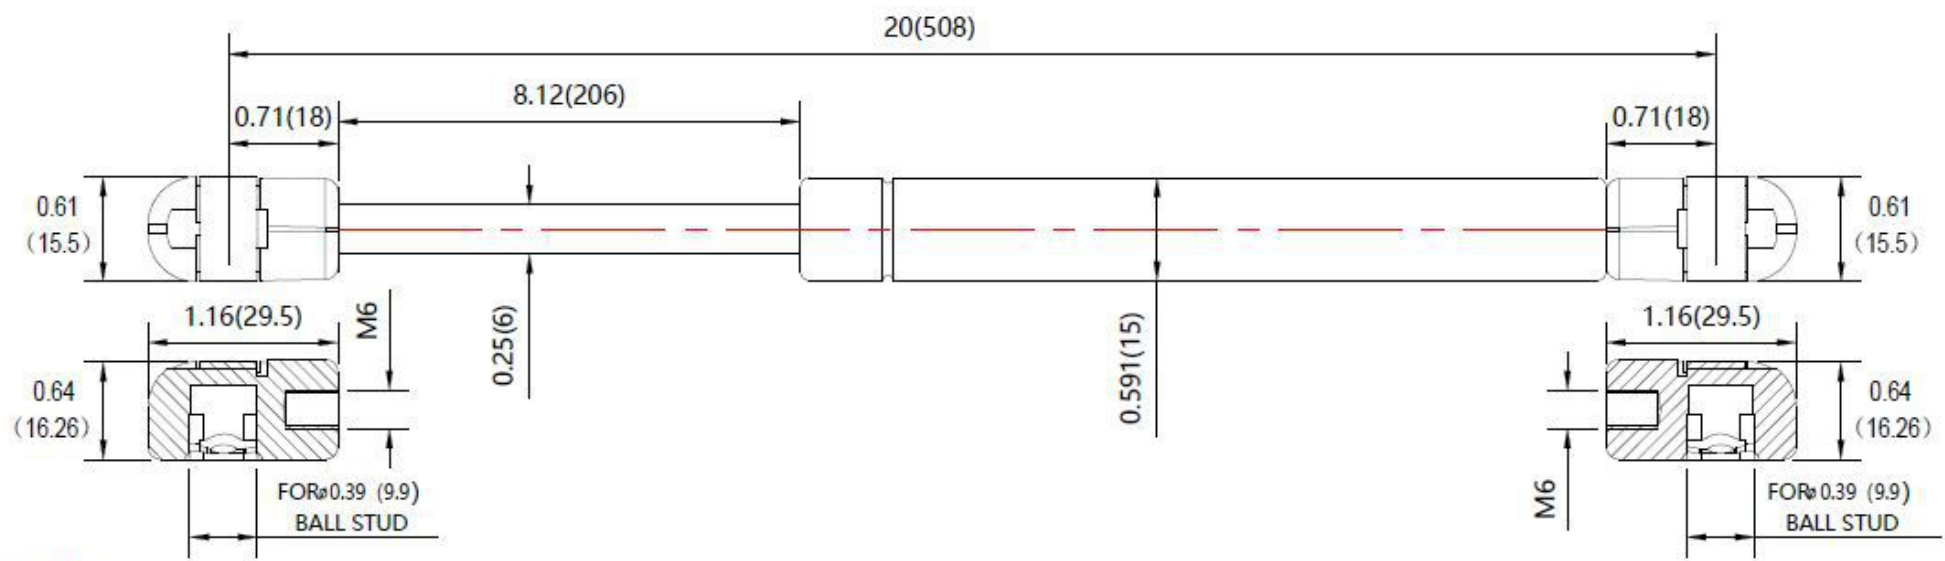




REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED



- NOTES**
1. MATERIAL : CYLINDER - HEAVY GAUGE STEEL , BLACK POWDERCOAT PAINT
ROD - HARDENED STEEL BLACK NITRIDE
 2. FORCE :80LBS/356N
 3. DIMENSIONS ASSUMING END CONNECTORS ARE FULLY SCREWED INTO PLACE
 4. DRAWING LENGTHS (NOT DIMENSIONED) OF CYLINDER AND ROD BODIES ARE NOT TO SCALE
 5. OPERATING TEMPERATURE : - 3 0 C TO + 8 0 C
 6. Label to include part number , date code , and warning message Label not to be remove
 7. Gas Spring not to be modified , or changed from manufactured , original , product
 8. Gas Spring to is suggested to be mounted shaft down (rod down) for maximum performance
 9. Connectors to be lined up per drawing . 5 degree deviation permitted
 10. Gas Springs will be individually packed in sealed clear plastic bags , to avoid damage , dust , or other foreign material - obiects
 11. Gas Spring to be assembled per the drawing with end fittings assembled / fastened
 12. Gas Springs are not to be opened
 13. Inside of each end fitting to be greased

	NAME	DATE
	Allen	12/13/19
DRAWN	CHECKED	
DWG NO	REV	
NSG2000S80PC1	0	
TITLE		
Gas Spring		
TOLERANCES	THIRD ANGLE PROJECTION	SCALE
X.X ±0.060		N.T.S.
X.XX ±0.030		SIZE
X.XXX ±0.015		B
ANGLES ±1.0°		
HOLES ±0.005	SHEET 1 OF 1	
REMOVE ALL BURRS & BREAK ALL SHARP EDGES	ALL DIMENSIONS ARE IN inch UNLESS OTHERWISE SPECIFIED	